



# **ATSC Digital Television Standard: Part 4 – MPEG-2 Video System Characteristics**

---

Document A/53 Part 4:2009, 7 August 2009

**Advanced Television Systems Committee, Inc.**  
1776 K Street, N.W., Suite 200  
Washington, D.C. 20006

The Advanced Television Systems Committee, Inc., is an international, non-profit organization developing voluntary standards for digital television. The ATSC member organizations represent the broadcast, broadcast equipment, motion picture, consumer electronics, computer, cable, satellite, and semiconductor industries.

Specifically, ATSC is working to coordinate television standards among different communications media focusing on digital television, interactive systems, and broadband multimedia communications. ATSC is also developing digital television implementation strategies and presenting educational seminars on the ATSC standards.

ATSC was formed in 1982 by the member organizations of the Joint Committee on InterSociety Coordination (JCIC): the Electronic Industries Association (EIA), the Institute of Electrical and Electronic Engineers (IEEE), the National Association of Broadcasters (NAB), the National Cable Telecommunications Association (NCTA), and the Society of Motion Picture and Television Engineers (SMPTE). Currently, there are approximately 140 members representing the broadcast, broadcast equipment, motion picture, consumer electronics, computer, cable, satellite, and semiconductor industries.

ATSC Digital TV Standards include digital high definition television (HDTV), standard definition television (SDTV), data broadcasting, multichannel surround-sound audio, and satellite direct-to-home broadcasting. Contact information is given below.

Mailing address    Advanced Television Systems Committee, Inc.  
                           1776 K Street, N.W., Suite 1200  
                           Washington, D.C. 20006

Telephone            202-872-9160 (voice), 202-872-9161 (fax)

Web site             <http://www.atsc.org>, E-mail: [standard@atsc.org](mailto:standard@atsc.org)

---

NOTE: The user's attention is called to the possibility that compliance with this standard may require use of an invention covered by patent rights. By publication of this standard, no position is taken with respect to the validity of this claim or of any patent rights in connection therewith. One or more patent holders have, however, filed a statement regarding the terms on which such patent holder(s) may be willing to grant a license under these rights to individuals or entities desiring to obtain such a license. Details may be obtained from the ATSC Secretary and the patent holder.

---

The revision history of this document is given below.

#### A/53 Part 4 Revision History

A/53 Part 4:2007 approved	3 January 2007
Amendment No. 1 approved	24 December 2007
A/53 Part 4:2009 approved	7 August 2009
Editorial correction to reference [17]	23 August 2011

# Table of Contents

<b>1. SCOPE</b>	<b>5</b>
<b>2. REFERENCES</b>	<b>5</b>
2.1 Normative References	5
2.2 Informative References	6
<b>3. COMPLIANCE NOTATION</b>	<b>6</b>
3.1 Treatment of Syntactic Elements	6
3.2 Symbols, Abbreviations, and Mathematical Operators	6
<b>4. SYSTEM OVERVIEW (INFORMATIVE)</b>	<b>7</b>
<b>5. POSSIBLE VIDEO INPUTS</b>	<b>8</b>
<b>6. SOURCE CODING SPECIFICATION</b>	<b>8</b>
6.1 Constraints with Respect to ISO/IEC 13818-2 Main Profile	9
6.1.1 Sequence Header Constraints	9
6.1.2 Compression Format Constraints	9
6.1.3 Sequence Extension Constraints	10
6.1.4 Sequence Display Extension Constraints	10
6.1.5 Picture Header Constraints	10
6.1.6 Picture Coding Constraints	11
6.2 Bit Stream Specifications Beyond MPEG-2	11
6.2.1 Picture Extension and User Data Syntax	11
6.2.2 Picture User Data Syntax	11
6.2.3 ATSC Picture User Data Semantics	12
6.2.3.1 Captioning Data	13
6.2.3.2 Bar Data	13
6.2.3.2.1 Recommended Receiver Response to Bar Data	15
6.2.4 Active Format Description Data	15
6.2.4.1 AFD Syntax	15
6.2.4.2 AFD Semantics	16
6.2.4.3 Recommended Receiver Response to AFD	17
6.2.5 Relationship Between Bar Data and AFD (Informative)	17

## Index of Tables and Figures

Table 5.1 Standardized Video Input Formats	8
Table 6.1 Sequence Header Constraints	9
Table 6.2 Compression Format Constraints	9
Table 6.3 Sequence Extension Constraints	10
Table 6.4 Sequence Display Extension Constraints	10
Table 6.5 Picture Extension and User Data Syntax (Informative)	11
Table 6.6 Picture User Data Syntax	11
Table 6.7 user_data_identifier Value Assignments	12
Table 6.8 ATSC_user_data Syntax	12
Table 6.9 user_data_type_code Value Assignments	12
Table 6.10 Captioning Data Syntax	13
Table 6.12 Line Number Designation	14
Table 6.11 Bar Data Syntax	14
Table 6.13 Active Format Description Syntax	16
Table 6.14 Active Format	17
Figure 4.1 ITU-R digital terrestrial television broadcasting model.	7
Figure 4.2 High level view of encoding equipment.	8

---

# **ATSC Digital Television Standard:**

## **Part 4 – MPEG-2 Video System Characteristics**

### **1. SCOPE**

This Part describes the characteristics of the video subsystem of the Digital Television Standard. The input formats and bit stream characteristics are described in separate sections.

### **2. REFERENCES**

At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreement based on this standard are encouraged to investigate the possibility of applying the most recent editions of the documents listed below.

#### **2.1 Normative References**

The following documents contain provisions which, through reference in this text, constitute provisions of this standard.

- [1] CEA: “Digital Television (DTV) Closed Captioning,” Doc. CEA-708-D, Consumer Electronics Association, Arlington, VA, August 2008.
- [2] ISO: “ISO/IEC IS 13818-1:2000 (E), International Standard, Information technology – Generic coding of moving pictures and associated audio information: systems.”
- [3] ISO: “ISO/IEC IS 13818-2:2000 (E), International Standard, Information technology – Generic coding of moving pictures and associated audio information: video.”
- [4] SMPTE: “Standard for Television—Component Video Signal 4:2:2, Bit-Parallel Digital Interface,” Doc. SMPTE 125M (1995), Society of Motion Picture and Television Engineers, White Plains, N.Y., 1995.
- [5] SMPTE: “Standard for Television—Composite Analog Video Signal, NTSC for Studio Applications,” Doc. SMPTE 170M (2004), Society of Motion Picture and Television Engineers, White Plains, N.Y., 2004.
- [6] SMPTE: “Standard for Television—Bit-Parallel Digital Interface, Component Video Signal 4:2:2 16 x 9 Aspect Ratio,” Doc. SMPTE 267M (1995), Society of Motion Picture and Television Engineers, White Plains, N.Y., 1995.
- [7] SMPTE: “Standard for Television—1920 x 1080 Scanning and Analog and Parallel Digital Interfaces for Multiple Picture Rates,” Doc. SMPTE 274M (2005), Society of Motion Picture and Television Engineers, White Plains, N.Y., 2005.
- [8] SMPTE: “Standard for Television—720 x 483 Active Line at 59.94-Hz Progressive Scan Production, Digital Representation,” Doc. SMPTE 293M (2003), Society of Motion Picture and Television Engineers, White Plains, N.Y., 2003.
- [9] SMPTE: “Standard for Television—1280 x 720 Progressive Image Sample Structure, Analog and Digital Representation and Analog Interface,” Doc. SMPTE 296M (2001), Society of Motion Picture and Television Engineers, White Plains, N.Y., 2001.

- [10] ETSI: “Digital Video Broadcasting (DVB): Implementation Guidelines for the use of MPEG-2 Systems, Video and Audio in Satellite, Cable and Terrestrial Broadcasting Applications,” Doc. ETSI TS 101 154 V1.7.1, Annex B, June 2005.

## 2.2 Informative References

- [11] Digital TV Group: “Digital Receiver Implementation Guidelines and Recommended Receiver Reaction to Aspect Ratio Signaling in Digital Video Broadcasting,” Issue 1.2.1, February 2001.
- [12] ITU: “Encoding Parameters of Digital Television for Studios,” Doc. ITU-R BT.601-5 (1994).
- [13] ITU: “Parameter values for the HDTV Standards for Production and International Programme Exchange,” Doc. ITU-R BT. 709-5 (2002).
- [14] SCTE: “Standard for Carriage of NTSC VBI Data in Cable Digital Transport Streams,” Doc. ANSI/SCTE 21 2001R2006, Society of Cable Telecommunications Engineers, Exton, PA, 2006.
- [15] CEA: “Active Format Description (AFD) & Bar Data Recommended Practice,” Doc. CEA-CEB16, Consumer Electronics Association, Arlington, VA, 31 July 2006.
- [16] SMPTE: “Standard for Television—Format for Active Format Description and Bar Data,” Doc. SMPTE 2016-1 (2007), Society of Motion Picture and Television Engineers, White Plains, N.Y.
- [17] ATSC: “Digital Television Standard, Part 1 – Digital Television System,” Doc. A/53, Part 1:2009, Advanced Television Systems Committee, Washington, D.C., 7 August 2009.
- [18] SMPTE Registration Authority: <http://www.smp-te-ra.org/mpegreg/mpegreg.html>

## 3. COMPLIANCE NOTATION

As used in this document, “shall” denotes a mandatory provision of the standard. “Should” denotes a provision that is recommended but not mandatory. “May” denotes a feature whose presence does not preclude compliance, that may or may not be present at the option of the implementor.


### 3.1 Treatment of Syntactic Elements

This document contains symbolic references to syntactic elements used in the audio, video, and transport coding subsystems. These references are typographically distinguished by the use of a different font (e.g., `restricted`), may contain the underscore character (e.g., `sequence_end_code`) and may consist of character strings that are not English words (e.g., `dynrng`).

### 3.2 Symbols, Abbreviations, and Mathematical Operators

The symbols, abbreviations, and mathematical operators used herein are as found in Section 3.4 of ATSC A/53 Part 1 [17].

`one_bits` – Each bit in fields marked, `one_bits`, shall be set to ‘1’.

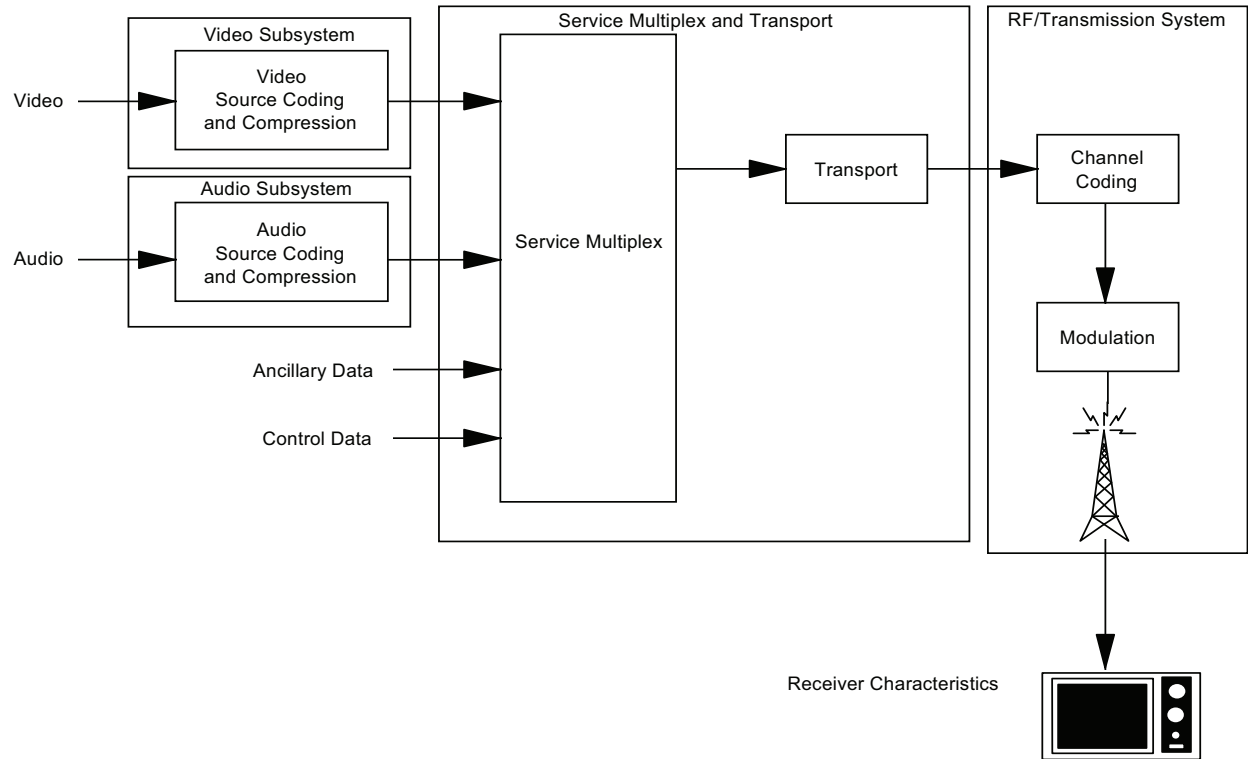

**Figure 4.1** ITU-R digital terrestrial television broadcasting model.


#### 4. SYSTEM OVERVIEW (INFORMATIVE)

A basic block diagram representation of the system is shown in Figure 4.1. According to this model, the digital television system can be seen to consist of three subsystems.

- Source coding and compression
- Service multiplex and transport
- RF/transmission

Figure 4.2 illustrates a high level view of the encoding equipment. This view is not intended to be representative of actual implementations, but is used to illustrate the relationship of various clock frequencies within the encoder.

The source coding domain, represented schematically by the video, audio, and transport encoders, uses a family of frequencies which are based on a 27 MHz clock ( $f_{27\text{MHz}}$ ). This clock is used to generate a 42-bit sample of the frequency which is partitioned into two parts defined by the MPEG-2 specification. These are the 33-bit `program_clock_reference_base` and the 9-bit `program_clock_reference_extension`. The former is equivalent to a sample of a 90 kHz clock which is locked in frequency to the 27 MHz clock, and is used by the audio and video source encoders when encoding the presentation time stamp (PTS) and the decode time stamp (DTS). The audio and video sampling clocks,  $f_a$  and  $f_v$  respectively, are frequency-locked to the 27 MHz clock. This can be expressed as the requirement that there exist two pairs of integers,  $(n_a, m_a)$  and  $(n_v, m_v)$ , such that

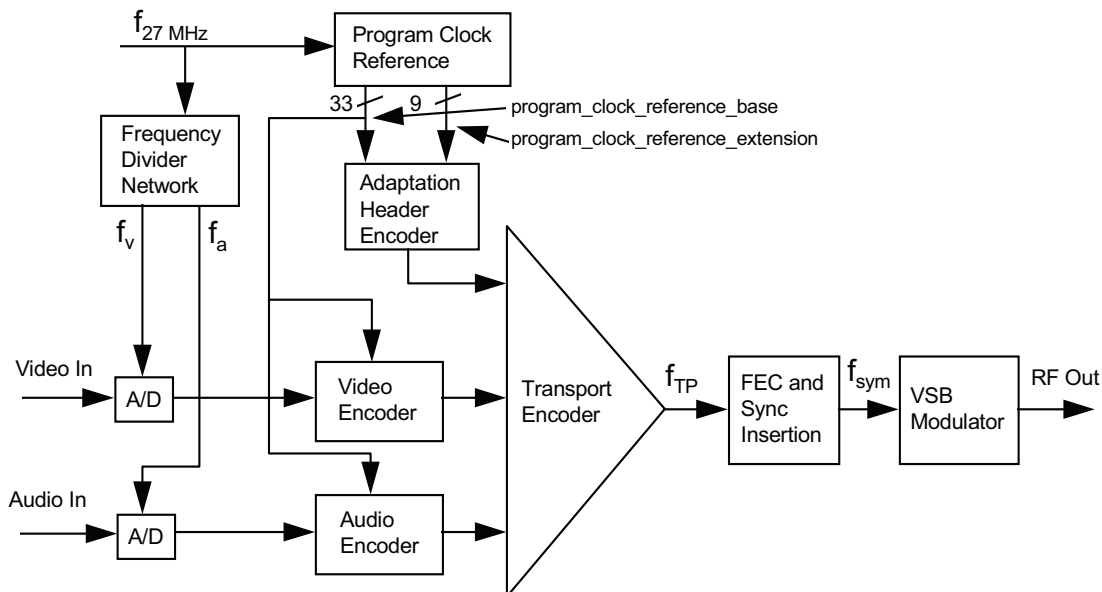

**Figure 4.2** High level view of encoding equipment.

$$f_a = \left( \frac{n_a}{m_a} \right) \times 27 \text{ MHz}$$

and

$$f_v = \left( \frac{n_v}{m_v} \right) \times 27 \text{ MHz}$$

## 5. POSSIBLE VIDEO INPUTS

While not required by this standard, there are certain television production standards, shown in Table 5.1, that define video formats that relate to compression formats specified by this standard.

**Table 5.1** Standardized Video Input Formats

Video Standard	Active Lines	Active Samples/ Line
SMPTE 274M [7]	1080	1920
SMPTE 296M [9]	720	1280
ITU-R BT.601-5 [12]	483	720

The compression formats may be derived from one or more appropriate video input formats. It may be anticipated that additional video production standards will be developed in the future that extend the number of possible input formats.

## 6. SOURCE CODING SPECIFICATION

The DTV video compression algorithm shall conform to the Main Profile syntax of ISO/IEC 13818-2 [3]. The allowable parameters shall be bounded by the upper limits specified for the



Main Profile at High Level.<sup>1</sup> Additionally, all bit streams shall meet the constraints and specifications described in Sections 6.1 and 6.2.

## 6.1 Constraints with Respect to ISO/IEC 13818-2 Main Profile

The following tables list the allowed values for each of the ISO/IEC 13818-2 [3] syntactic elements which are restricted beyond the limits imposed by MP@HL.

In these tables conventional numbers denote decimal values, numbers preceded by 0x are to be interpreted as hexadecimal values and numbers within single quotes (e.g., '10010100') are to be interpreted as a string of binary digits.

### 6.1.1 Sequence Header Constraints

Table 6.1 identifies parameters in the sequence header of a bit stream that shall be constrained by the video subsystem and lists the allowed values for each.

**Table 6.1** Sequence Header Constraints

Sequence Header Syntactic Element	Allowed Value
horizontal_size_value	see Table 6.2
vertical_size_value	see Table 6.2
aspect_ratio_information	see Table 6.2
frame_rate_code	see Table 6.2
bit_rate_value ( $\leq 19.4$ Mbps)	$\leq 48500$
bit_rate_value ( $\leq 38.8$ Mbps)	$\leq 97000$
vbv_buffer_size_value	$\leq 488$

The allowable values for the field bit\_rate\_value are application-dependent. In the primary application of terrestrial broadcast, this field shall correspond to a bit rate which is less than or equal to 19.4 Mbps. In the high data rate mode, the corresponding bit rate is less than or equal to 38.8 Mbps.

### 6.1.2 Compression Format Constraints

Table 6.2 lists the allowed compression formats.

**Table 6.2** Compression Format Constraints

vertical_size_value	horizontal_size_value	aspect_ratio_information	frame_rate_code	progressive_sequence
1080 <sup>a</sup>	1920	1,3	1,2,4,5	'1'
			4,5	'0'
720	1280	1,3	1,2,4,5,7,8	'1'
480	704	2,3	1,2,4,5,7,8	'1'
			4,5	'0'
	640	1,2	1,2,4,5,7,8	'1'
			4,5	'0'
<b>Legend for MPEG-2 coded values:</b>				
aspect_ratio_information: 1 = square samples, 2 = 4:3 display aspect ratio, 3 = 16:9 display aspect ratio				
frame_rate_code: 1 = 23.976 Hz, 2 = 24 Hz, 4 = 29.97 Hz, 5 = 30 Hz, 7 = 59.94 Hz, 8 = 60 Hz				
progressive_sequence: '0' = interlaced scan, '1' = progressive scan				

- a. Note that 1088 lines are actually coded in order to satisfy the MPEG-2 requirement that the coded vertical size be a multiple of 16 (progressive scan) or 32 (interlaced scan). The bottom 8 lines are black, per MPEG rules.

1. See ISO/IEC 13818-2 [3] Section 8 for more information regarding profiles and levels.

### 6.1.3 Sequence Extension Constraints

Table 6.3 identifies parameters in the sequence extension part of a bit stream that shall be constrained by the video subsystem and lists the allowed values for each. A `sequence_extension` structure is required to be present after every `sequence_header` structure.

**Table 6.3** Sequence Extension Constraints

Sequence Extension Syntactic Element	Allowed Values
<code>progressive_sequence</code>	see Table 6.2
<code>profile_and_level_indication</code>	see Note
<code>chroma_format</code>	'01'
<code>horizontal_size_extension</code>	'00'
<code>vertical_size_extension</code>	'00'
<code>bit_rate_extension</code>	'0000 0000 0000'
<code>vbv_buffer_size_extension</code>	'0000 0000'
<code>frame_rate_extension_n</code>	'00'
<code>frame_rate_extension_d</code>	'0000 0'

Note: The `profile_and_level_indication` field shall indicate the lowest profile and level defined in ISO/IEC 13818-2 [3] Section 8 that is consistent with the parameters of the video elementary stream.

### 6.1.4 Sequence Display Extension Constraints

Table 6.4 identifies parameters in the sequence display extension part of a bit stream that shall be constrained by the video subsystem and lists the allowed values for each.

**Table 6.4** Sequence Display Extension Constraints

Sequence Display Extension Syntactic Element	Allowed Values
<code>video_format</code>	'000'

The values for `color_primaries`, `transfer_characteristics`, and `matrix_coefficients` shall be explicitly indicated in the `sequence_display_extension`. While all values for `color_primaries`, `transfer_characteristics`, and `matrix_coefficients` defined in Tables 6-7, 6-8, and 6-9 of ISO/IEC 13818-2 [3] are allowed in the transmitted bit stream, it is noted that those of ITU-R BT.709 [13] and SMPTE 170M [5] are the most likely to be in common use.

Note: Some previously-encoded legacy material may not have the colorimetry (i.e., `color_primaries`, `transfer_characteristics`, and `matrix_coefficients`) explicitly indicated in the `sequence_display_extension`, in which case the colorimetry is most likely ITU-R BT.709 [13] for all formats except those formats with `vertical_size_value` = 480, which are most likely to have colorimetry according to SMPTE 170M [5].

### 6.1.5 Picture Header Constraints

In all cases other than when `vbv_delay` has the value 0xFFFF, the value of `vbv_delay` shall be constrained as follows:

$$\text{vbv\_delay} \leq 45000$$

### 6.1.6 Picture Coding Constraints

The value `frame_pred_frame_dct` shall be '1' if `progressive_frame` is '1'.

## 6.2 Bit Stream Specifications Beyond MPEG-2

This section covers the extension and user data part of the video syntax. The syntax used for the insertion of closed captioning<sup>2</sup>, bar data and active format description in user data is described. "Picture user data" is used here to refer to user data inserted according to ISO/IEC 13818-2 [3], `extension_and_userdata(2)` structure placement as defined in ISO/IEC 13818-2, Section 6.2.2 [3], which follows the `picture_header()` and `picture_coding_extension()` structures.

### 6.2.1 Picture Extension and User Data Syntax

The picture user data shall be constructed per ISO/IEC 13818-2 Section 6.2.2.2 [3]. Table 6.5 reproduces this syntax for the convenience of the reader, with the value 'i' replaced with the value '2' indicating the syntactic placement at the picture level (following `picture_coding_extension()`).

**Table 6.5** Picture Extension and User Data Syntax (Informative)

Value	No. of Bits	Format
<pre> extension_and_user_data(2) {   while ((nextbits() == extension_start_code)             (nextbits() == user_data_start_code)) {     if (nextbits() == extension_start_code)       <b>extension_data(2)</b>     if (nextbits() == user_data_start_code)       <b>user_data()</b>   } } </pre>		

Note: In accordance with the bit stream syntax in Table 6.5, more than one picture user data construct may follow any given picture header.

No more than one `user_data()` structure using the same `user_data_type_code` (see Table 6.8 and Table 6.9) shall be present following any given picture header.

### 6.2.2 Picture User Data Syntax

Table 6.6 describes the picture user data syntax that shall be used for the `user_data()` structure carried in `extension_and_userdata(2)` of Section 6.2.2.2 of [3], reproduced for convenience in Table 6.5.

**Table 6.6** Picture User Data Syntax

Syntax	No. of Bits	Format
<pre> user_data() {   <b>user_data_start_code</b>   <b>user_data_identifier</b>   user_structure() } </pre>	<pre> 32 32 </pre>	<pre> bslbf bslbf </pre>

2. Implementers should note that CEA-708 [1] describes the semantics for closed captions.

Receiving devices are expected to silently discard any unrecognized video user data encountered in the video bit stream. For example, if an unrecognized `user_data_identifier` is seen following the `user_data_start_code`, the user data should be discarded until another start code prefix is seen.

### 6.2.3 ATSC Picture User Data Semantics

**user\_data\_start\_code** – This shall be set to 0x0000 01B2, which is the value is established for user data by ISO/IEC 13818-2 [3].

**user\_data\_identifier** – This is a 32 bit code that indicates the syntax and semantics of the `user_structure()` according to Table 6.7. It should be set to a registered value of the `format_identifier` as defined in ISO/IEC 13818-1 [2] and maintained by the SMPTE RA [18].

Note: Use of registered values, while not mandatory, is highly recommended as non-registered values can lead to errors in receiver processing of privately-supplied `user_data()` packets. The list of registered values is available at <http://www.smptra.org/mpegreg/mpegreg.html>. Not all of these have application as `user_data_identifier` values in this context.

**user\_structure()** – This is a variable length data structure defined by the value of `user_data_identifier` and shall be set according to Table 6.7.

**Table 6.7** `user_data_identifier` Value Assignments

<b>user_data_identifier value</b>	<b>user_structure()</b>
0x47413934 (“GA94”)	ATSC_user_data() (as defined in Table 6.8)
0x44544731 (“DTG1”)	afd_data() (as defined in Section 6.2.4)
All other values	Not defined in this Standard.

**Table 6.8** ATSC\_user\_data Syntax

<b>Syntax</b>	<b>No. of Bits</b>	<b>Format</b>
<pre> ATSC_user_data() {     user_data_type_code     user_data_type_structure() } </pre>	8	uimsbf

**user\_data\_type\_code** – This is an 8-bit value that identifies the type of ATSC user data to follow in the `user_data_type_structure()` and shall be set according to Table 6.9.

**Table 6.9** `user_data_type_code` Value Assignments

<b>user_data_type_code value</b>	<b>user_data_type_structure()</b>
0x00 – 0x02	ATSC Reserved
0x03	MPEG_cc_data() (as defined in Table 6.10)
0x04 – 0x05	ATSC Reserved
0x06	bar_data() (as defined in Section 6.2.3.2)
0x07 – 0xFF	ATSC Reserved

## 6.2.3.1 Captioning Data

Table 6.10 describes the syntax of captioning data.

**Table 6.10** Captioning Data Syntax

Syntax	No. of Bits	Format
MPEG_cc_data() { cc_data() <b>marker_bits</b> }	8	'1111 1111'

**cc\_data()** shall be as defined in CEA-708 [1], Table 2.

## 6.2.3.2 Bar Data

Table 6.11 describes the syntax of bar data. Bar data should be included in video user data whenever the rectangular picture area containing useful information does not extend to the full height or width of the coded frame<sup>3</sup> and AFD alone is insufficient to describe the extent of the image. See Section 6.2.4.

When present, bar data shall be carried in the data structure `bar_data()`, within the picture user data syntax as shown in Table 6.6. After any `sequence_header()` such bar data shall appear before the next `picture_data()` within `extension_and_user_data(2)`. After introduction, such bar data shall remain in effect until:

- 1) the next `sequence_header()`, or
- 2) `extension_and_user_data(2)` containing a `bar_data()` structure which contains new bar data, or
- 3) `extension_and_user_data(2)` containing AFD per Section 6.2.4.

After any `sequence_header()`, unless AFD data is present specifying otherwise, the absence of bar data shall indicate that the rectangular picture area containing useful information extends to the full height and width of the coded frame.

Bar data is constrained (below) to be signalled in pairs, either top and bottom bars or left and right bars, but not both pairs at once. Bars may be unequal in size. One bar of a pair may be zero width or height.

---

3. In other words, the video is letterboxed (bars above and/or below video) or pillarboxed (bars left and/or right of video).

**Table 6.11** Bar Data Syntax

Syntax	No. of Bits	Format
<code>bar_data() {</code>		
<b>top_bar_flag</b>	1	bslbf
<b>bottom_bar_flag</b>	1	bslbf
<b>left_bar_flag</b>	1	bslbf
<b>right_bar_flag</b>	1	bslbf
<b>reserved</b>	4	'1111'
if (top_bar_flag == '1') {		
<b>one_bits</b>	2	'11'
<b>line_number_end_of_top_bar</b>	14	uimsbf
}		
if (bottom_bar_flag == '1') {		
<b>one_bits</b>	2	'11'
<b>line_number_start_of_bottom_bar</b>	14	uimsbf
}		
if (left_bar_flag == '1') {		
<b>one_bits</b>	2	'11'
<b>pixel_number_end_of_left_bar</b>	14	uimsbf
}		
if (right_bar_flag == '1') {		
<b>one_bits</b>	2	'11'
<b>pixel_number_start_of_right_bar</b>	14	uimsbf
}		
}		

Designation of line numbers for `line_number_end_of_top_bar` and `line_number_start_of_bottom_bar` is video format-dependent and shall conform to the applicable standard indicated in Table 6.12.

Note: The range of line numbers and pixels within the coded frame for each image format is specified in Table 2 of SMPTE 2016-1 [17].

**Table 6.12** Line Number Designation

Video Format	Applicable Standard
480 Interlaced 4:3	SMPTE 125M [4]
480 Interlaced 16:9	SMPTE 267M [6]
480 Progressive	SMPTE 293M [8]
720 Progressive	SMPTE 296M [9]
1080 Interlaced	SMPTE 274M [7]
1080 Progressive	SMPTE 274M [7]

**top\_bar\_flag** – This flag shall indicate, when set to '1', that the top bar data is present. If `left_bar_flag` is '1', this flag shall be set to '0'.

**bottom\_bar\_flag** – This flag shall indicate, when set to '1', that the bottom bar data is present. This flag shall have the same value as `top_bar_flag`.

**left\_bar\_flag** – This flag shall indicate, when set to '1', that the left bar data is present. If `top_bar_flag` is '1', this flag shall be set to '0'.

**right\_bar\_flag** – This flag shall indicate, when set to '1', that the right bar data is present. This flag shall have the same value as `left_bar_flag`.

**line\_number\_end\_of\_top\_bar** – A 14-bit unsigned integer value representing the last line of a horizontal letterbox bar area at the top of the reconstructed frame. Designation of line numbers shall be as defined per each applicable standard in Table 6.12.

**line\_number\_start\_of\_bottom\_bar** – A 14-bit unsigned integer value representing the first line of a horizontal letterbox bar area at the bottom of the reconstructed frame. Designation of line numbers shall be as defined per each applicable standard in Table 6.12.

**pixel\_number\_end\_of\_left\_bar** – A 14-bit unsigned integer value representing the last horizontal luminance sample of a vertical pillarbox bar area at the left side of the reconstructed frame. Pixels shall be numbered from zero, starting with the leftmost pixel.

**pixel\_number\_start\_of\_right\_bar** – A 14-bit unsigned integer value representing the first horizontal luminance sample of a vertical pillarbox bar area at the right side of the reconstructed frame. Pixels shall be numbered from zero, starting with the leftmost pixel.

#### 6.2.3.2.1 Recommended Receiver Response to Bar Data

Receiving device designers are strongly encouraged to study Consumer Electronics Association (CEA) bulletin CEB16 [16], which contains recommendations regarding the processing of bar data.

#### 6.2.4 Active Format Description Data

Active Format Description (AFD) should be included in video user data whenever the rectangular picture area containing useful information does not extend to the full height or width of the coded frame. AFD data may also be included in user data when the rectangular picture area containing useful information extends to the full height and width of the coded frame.

When present, the AFD shall be carried using the syntax defined in [10], in `extension_and_user_data(2)` in the MPEG-2 video Elementary Stream. After any `sequence_header()` the default aspect ratio of the area of interest shall be that signaled by the parameters in the `sequence_header()` and `sequence_display_extension()` structures. After any `sequence_header()` the AFD, when present, shall appear before the next `picture_data()`. After introduction, such an AFD shall remain in effect until the next `sequence_header()` or until a new AFD is introduced.

Note: The AFD syntax as shown in Section 6.2.4.1, when combined with the structures above to form the entire user data structure, is identical to that specified in ETSI TS 101 154 V1.7.1 [10], and is reprinted here with permission. Semantics are documented in Section 6.2.4.2; some are intentionally different from those in ETSI 101 154.

##### 6.2.4.1 AFD Syntax

Table 6.13 shows the syntax defined in [10] which is provided for the convenience of the reader.

**Table 6.13** Active Format Description Syntax

Syntax	No. of Bits	Format
afd_data() {		
<b>zero</b>	1	'0'
<b>active_format_flag</b>	1	bslbf
<b>reserved<sup>a</sup></b>	6	'00 0001'
if (active_format_flag == '1') {		
<b>reserved</b>	4	'1111'
<b>active_format</b>	4	bslbf
}		
}		

- a. Note: The term and field, “reserved”, is shown as published by ETSI and does not have the meaning of “reserved” as defined by ATSC.

#### 6.2.4.2 AFD Semantics

**active\_format\_flag** – A 1 bit flag. A value of ‘1’ indicates that an active format is described in this data structure.

**active\_format** – A 4 bit field describing the “area of interest” in terms of its aspect ratio within the coded frame as defined in ISO/IEC 13818-2 [3].

The active\_format is used by the decoder in conjunction with the “source aspect ratio.” The source aspect ratio is derived from the “display aspect ratio” (DAR) signaled in the aspect\_ratio\_information, the horizontal\_size, vertical\_size, and display\_horizontal\_size, and display\_vertical\_size if present (see ISO/IEC 13818-2 [3]):

- If sequence\_display\_extension() is not present, source aspect ratio =
- If sequence\_display\_extension() is present, source aspect ratio =

$$\text{DAR} \times \frac{\text{display\_horizontal\_size}}{\text{display\_vertical\_size}} \times \frac{\text{vertical\_size}}{\text{horizontal\_size}}$$

The combination of source aspect ratio and active\_format allows the decoder to identify whether the “area of interest” is the whole of the frame (e.g., source aspect ratio 16:9, active\_format 16:9 center), a letterbox within the frame (e.g., source aspect ratio 4:3, active\_format 16:9 center), or a “pillarbox” within the frame (e.g. source aspect ratio 16:9, active\_format 4:3 center).

Table 6.14 defines the coding of the active\_format field that shall be used.



**Table 6.14** Active Format

active_format	Description	
	4:3 coded frames	16:9 coded frames
'0000'	undefined (see below)	undefined (see below)
'0001'	Reserved	Reserved
'0010' – '0011'	Not recommended	Not recommended
0100	Aspect ratio greater than 16:9 (see below)	Aspect ratio greater than 16:9 (see below)
'0101' – '0111'	Reserved	Reserved
'1000'	4:3 full frame image	16:9 full frame image
'1001'	4:3 full frame image	4:3 pillarbox image
'1010'	16:9 letterbox image	16:9 full frame image
'1011'	14:9 letterbox image	14:9 pillarbox image
'1100'	Reserved	Reserved
'1101'	4:3 full frame image, alternative 14:9 center	4:3 pillarbox image, alternative 14:9 center
'1110'	16:9 letterbox image, alternative 14:9 center	16:9 full frame image, alternative 14:9 center
'1111'	16:9 letterbox image, alternative 4:3 center	16:9 full frame image, alternative 4:3 center

AFD '0000' indicates that information is not available and is undefined. Unless bar data is available, DTV receivers and video equipment should interpret the active image area as being the same as that of the coded frame.

AFD '0000', when accompanied by bar data, signals that the image's aspect ratio is narrower than 16:9, but is not either 4:3 or 14:9. The bar data should be used to determine the extent of the image.

AFD '0100', which should be accompanied by bar data, signals that the image's aspect ratio is wider than 16:9, as is typically the case with widescreen features. The bar data should be used to determine the height of the image.

Use of either '0010' or '0011' is not recommended in the ATSC television system. Values '0001', '0101' through '0111', and '1100' are reserved.

#### 6.2.4.3 Recommended Receiver Response to AFD

Receiving device designers are strongly encouraged to study Consumer Electronics Association (CEA) bulletin CEB16 [16], which contains recommendations regarding the processing of AFD.

#### 6.2.5 Relationship Between Bar Data and AFD (Informative)

Certain combinations of Active Format Description and bar data may be present in video user data (either, neither, or both). Note that AFD data may not always exactly match bar data because AFD only deals with 4:3, 14:9, and 16:9 aspect ratios while bar data can represent nearly any aspect ratio. When AFD and bar data are present together, AFD should be used in preference to bar data, except in the cases of AFD '0000' and '0100', where bar data should be used in concert with AFD as described above.

